

FIBER TERMINATION BOX · IP65 TERMINATION BOX

IP65 TERMINATION BOX



BRIEF

Fiber termination Box, loaded with 2 LC/APC Duplex adaptor, 4 G657.A pigtail, with lock, ready to add compact splitter ABS+PC Fiber Optic Distribution Box is used as a termination point for the feeder cable to connect with drop cable in FTTx communication network system. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building..

FEATURES

Total enclosed structure. Clamping for feeder cable and drop cable, fiber splicing, fixation, storage, distribution...etc all in one. Cable, pigtails, patch cords are running through own path without disturbing each other, cassette type SC adaptor installation, easy maintenance. Cabinet can be installed by the way of wall-mounted or poled-mounted, suitable for both indoor and outdoor uses. It's especially applicable to FTTH optical fiber distribution.

Material: PC+ABS, wet-proof, water-proof, dust-proof, anti-aging, protection level up to IP65. Distribution panel can be flipped up, feeder cable can be placed in a cup-joint way, easy for maintenance and installation. Wall-mounting

TECHNICAL SPECIFICATIONS

TYPE		Capacity	Max 4 core
Size (L*W*H, mm)	186(H)*116(W)*41(D)mm	Splice	Max 4 core
Application Scenarios	Outdoor	Cable entry size(mm)	Max 11mm

TECHNICAL SPECIFICATIONS


TYPE		Box Material	PP+GF
Drop cable entry	4 – 2x3mm	Product color	White
Installation Type	Wall-mounted	Protection class	IP55

CONFIGURATION

DESCRIPTION	QTY
Wall mounting accessories	1set
LC/APC Duplex adaptor	2 pcs
1M LC/APC pigtail 0.9, G657.A	4 pcs
Accessories	1set

TECHNICAL DRAWING

Unit of length: mm

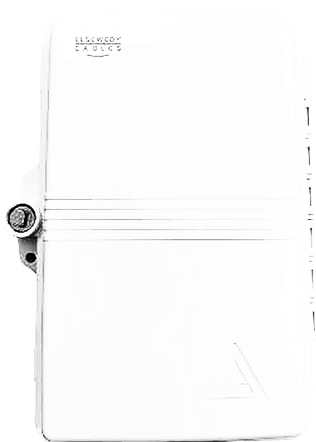

DESIGN



ORDERING INFORMATION

PRODUCT REFERENCE

SW1318 1111

DESCRIPTION

IP65 Termination Box

IP65 Termination Box.

Manufactured by Elsewedy Telecom Cables A.R.E., 10th of Ramadan City, Industrial Zone (A3), Egypt.